

5IM10-20/CX3000-O/O Triplexer

◆ Features:

- Contiguous VSWR of 1.34:1 from 20 to 3000 MHz
- Less than 1.0 dB Loss Across the Passbands
- SMA Female Connectors


◆ Specifications:

1.0 dB Loss:	@ 20 - 450 MHz	30 dB:	@ 90 - 450 MHz
	@ 550 - 925 MHz	30 dB:	@ 1100 - 3000 MHz
	@ 1100 - 3000 MHz	50 dB:	@ 20 - 800 MHz
		30 dB:	@ 800 - 925 MHz
VSWR		Group Delay Variation	
1.34:1:	20 - 3000 MHz	< 6.0 nS:	Across 20 - 450 MHz
Rejection		< 6.0 nS:	Across 550 - 925 MHz
30 dB:	@ 550 - 3000 MHz	< 6.0 nS:	Across 1100 - 3000 MHz
50 dB:	@ 20 - 90 MHz		




◆ Applications:

- Aeronautical Navigation
- Fixed & Mobile Broadcasting
- Military
- Commercial

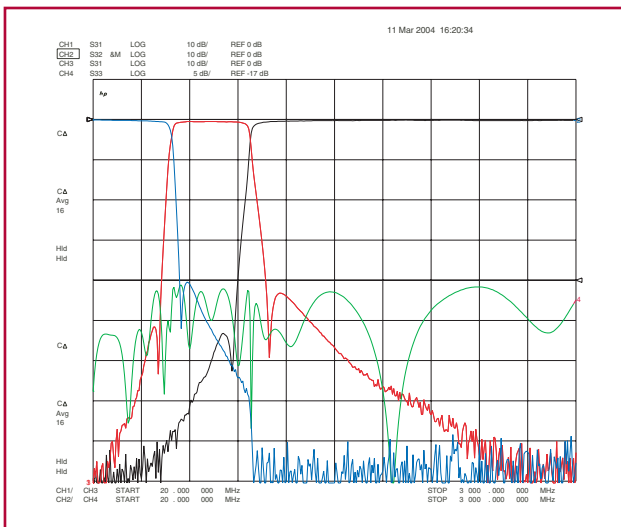

All Passbands

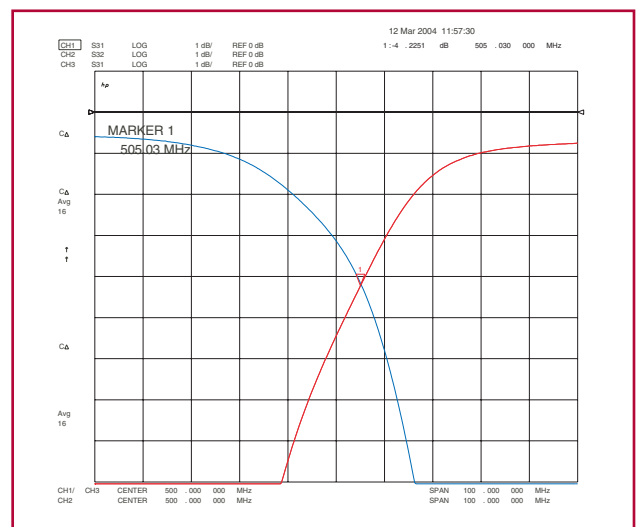

Crossover @ 500 MHz

Filtering Solutions for Your Global Market

USA

Phone: 410-749-2424
 FAX: 410-749-5725
 Email: sales@klmicrowave.com


EUROPE

Phone: +44-(0)-1908-547920
 FAX: +44-(0)-1908-695284
 Email: sales@kleurope.com

Order On-Line @ www.klmicrowave.com



5IM10-20/CX3000-0/0 Triplexer

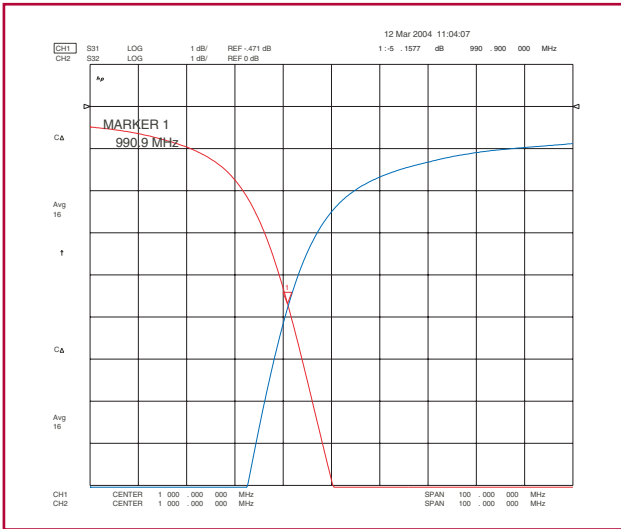

Crossover @ 1000 MHz

Filtering Solutions for Your Global Market

USA

Phone: 410-749-2424
FAX: 410-749-5725
Email: sales@klmicrowave.com

EUROPE

Phone: +44-(0)-1908-547920
FAX: +44-(0)-1908-695284
Email: sales@kleurope.com

Order On-Line @ www.klmicrowave.com

